



**MORRIS**  
LUBRICANTS

---

# COMMERCIAL VEHICLE PRODUCTS

---



PERFORMANCE **DELIVERED** THROUGH TECHNOLOGY...



## PERFORMANCE DELIVERED THROUGH TECHNOLOGY...

Morris Lubricants is proud to have been innovating and developing quality lubricants solutions for the Commercial Vehicle industry for over 150 years. Using years of knowledge and experience has helped us understand and create a range of products that meet the varied needs of today's mixed fleet and protects commercial vehicles even in the most arduous conditions.

Working continuously to overcome the demands of the world's major commercial vehicle OEM's ensures that our manufacturer approved products maximise vehicle performance, service life and reliability. These include trucks,

coaches and buses utilising previous and current technologies. With ever increasing complexity of after-treatment devices (particulate filters and catalysts) our products ensure engines comply with the very latest emissions legislation, whilst utilising new base fluid and additive technology to provide major advances in fuel economy.

Nurturing our customer relationships is key to the company's success. With expert technical advice and customer support available, allowing our team to identify the correct lubricants and make a recommendation that our customers can understand and trust.



### OVER 150 YEARS OF TRADITION IN EXCELLENCE

James Kent Morris could never have envisaged the future evolution of his business to a global oil exporter when he set up shop in Shrewsbury on December 7, 1869. Over 150 years later and now one of the leading oil blenders in Europe, Morris Lubricants has exported its Superior Quality Lubricants to 90 Countries worldwide. With a proud British heritage the company is one of the largest family-owned lubricants manufacturers that goes back 5 generations.

### GUY MARTIN – BRAND AMBASSADOR

One minute he may be working under a truck, the next racing around a road circuit on a superbike or taking part in another challenge for TV, but Guy Martin remains as down-to-earth as a Lincolnshire lad could be. Now as a proud ambassador for Morris Lubricants he commented on his first visit to the factory:



*"I just thought it was a few blokes in a shed in Shrewsbury, but to come here and see what goes into the blending and testing of the oils is amazing. I was really impressed by the whole Morris operation and it's now an honour to be part of it."*




Versimax is an innovative range of superior quality OEM approved heavy duty diesel engine oils. Suitable for previous and current generation diesel engines, including those that utilise after treatment devices. The range provides maximum rationalisation potential in mixed fleets where a number of manufacturers, models and engine technologies are being used. Ideal for operators of trucks, buses, coaches, off-highway, power generation and agricultural equipment.

**VERSIMAX**  
SUPERIOR QUALITY DIESEL ENGINE OIL

Product Name	Pack Sizes	Part No.	Specifications
Versimax HDI9 10W-30	25L	HDN 025	ACEA E7 / E8 / E11, API CK-4 / SN, CAT ECF-3, Detroit Diesel 93K218 / 93K222, Deutz DQC IV-18 LA, JASO DH-2-24, DTFR 15C100, 15C110, 15C120, MTU category 3.1, MAN M3775, Renault Truck RLD-3, Volvo VDS-4.5, Mack EO-S 4.5, Cummins CES 20081 / CES 20086, DAF PSQL 2.1E-LD / PSQL 2.4.
	205L	HDN 205	
Versimax HDI8 5W-20	25L	HDE 025	Scania LDF-5, MAN M3977.
	205L	HDE 205	
Versimax HDI5 5W-30	25L	VMT 025	API FA-4 /SN, JASO DH-2, Cummins CES 20087, Detroit Diesel DFS 93K223. <b>Approvals:</b> DTFR 15C130, Volvo VDS-5, Renault RLD-5, Mack EOS-5.
	205L	VMT 205	
Versimax HDI4 10W-30	25L	VMF 025	API CK-4, ACEA E7 / E11, CAT ECF-3, Cummins CES 20086, Detroit Diesel DFS Oil Specification 93K222, DTFR 15C100, MAN 3775, Deutz DQC III-18 LA, MTU Type 2.1, Ford WSS-M2C171-F1, JASO DH-2. <b>Approvals:</b> Volvo VDS-4.5, Mack EO-S-4.5, Renault VI RLD-3.
	205L	VMF 205	
Versimax HDI2 15W-40	25L	ACK 025	API CK-4 / SN, ACEA E7 / E11, CAT ECF-3, Detroit Diesel DFS Oil Specification 93K222, DTFR 15C100, MAN 3775, Deutz DQC III-18 LA, MTU Type 2.1, Ford WSS-M2C171-F1, JASO DH-2, Allison TES-439. <b>Approvals:</b> Volvo VDS-4.5, Mack EO-S-4.5, Renault VI RLD-3, Cummins CES 20086.
	205L	ACK 205	
Versimax HDI1 5W-30	25L	LDF 025	ACEA E7 / E8 / E11, API CK-4, Caterpillar ECF-3, Detroit Diesel 93K222, Deutz DQC IV-18 LA, DTFR 15C100 / 15C120, JASO DH-2, MAN M3677, MTU Type 3.1, Voith Class B. <b>Approvals:</b> DTFR-Approval 15C110, Mack EO-S 4.5 Approval, MAN M3775 Approval, Renault VI RLD-3 Approval, Meets Scania LDF-4 specification, Volvo VDS-4.5 Approval, Cummins 20086 Approval.
	205L	LDF 205	
Versimax HD9 10W-40	4 x 5L	EST 005	ACEA E7 / E8 / E11, API CK-4 / SN, CAT ECF-3, Detroit Diesel 93K222, Deutz DQC IV-18 LA, JASO DH-2-24, MTU category 3.1, DTFR 15C100 / 15C120. <b>Approvals:</b> Cummins CES 20086, DTFR 15C110, Mack EO-S 4.5, MAN M3775, Renault Truck RLD-3, Volvo VDS-4.5
	25L	EST 025	
	205L	EST 205	
Versimax HD8 10W-40	4 x 5L	RUL 005	ACEA E8, DAF, DTFR 15C110.
	25L	RUL 025	
	205L	RUL 205	
Versimax HD5 10W-40	25L	XHS 025	API CI-4, ACEA E4 / E7, Volvo VDS-3, Scania LDF-3, MTU Type 3, Mack EO-N, Cummins CES 20077/78, Renault Trucks RLD-2, Deutz DQCIV-10, DTFR 15B120, MAN M3277.
	205L	XHS 205	
Versimax HD4 15W-40	4 x 5L	RVS 005	ACEA E7, API CI-4/SL, Caterpillar ECF-2, Cummins CES 20076 / 77 / 78, MAN M3275-I, MACK EO-N, RVI RLD2, Volvo VDS3, MTU Type 2, DTFR 15B110 Approval.
	25L	RVS 025	
	205L	RVS 205	
Versimax HD3 20W-50	4 x 5L	RIT 005	ACEA E7, API CI-4 / SL, DTFR 15B110, Caterpillar ECF-2, MACK EO-L, Renault VI RD, Volvo VDS-2.
	25L	RIT 025	
	205L	RIT 205	



Fuel economy and shift comfort have put increasing demands on transmissions, driving the development of a range of products with optimised friction and wear control features.

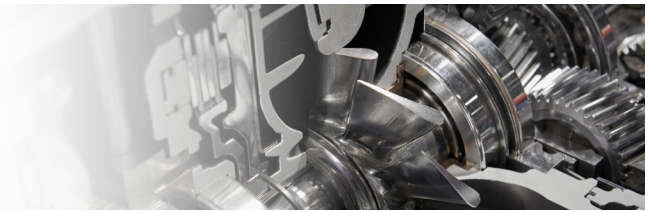

Product Name	Pack Sizes	Part No.	Specifications
Ecotrans 75W-80	25L	ECT 025	API GL-4, Renault (In accordance with Renault Note Technique B0032/2 Annex 3), MAN 341 Type E3, Z-4, Volvo 97307, ZF TE ML 01L, 02L, 08, 13*,16K, 24A, Can be used in DAF, Eaton (Eaton Europe - 300,000 kms or 3 years) and Iveco transmissions where a product of this type is specified. *where ZF TE-ML 13 stipulates ZF TE-ML 02L
	205L	ECT 205	
EP80W-90	4 x 5L	EPE 005	API GL-5.
	25L	EPE 025	
	205L	EPE 205	
EP85W-140	4 x 5L	EPG 005	API GL-5.
	25L	EPG 025	
Lodexol 80W-90	12 x 1L	LOE 001	API GL-4, MAN 341 E-1, MAN 341 Z-2, MB 235.1 ZF TE-ML 02B, 16A, 17A, 19A
	4 x 5L	LOE 005	
	25L	LOE 025	
	205L	LOE 205	
Lodexol HPS 75W-90	25L	HPS 025	API GL-4 / 5, API MT-1, SAE J2360, MAN 341 Type Z2/ Type GAI, MAN 342 S1/ M3, Mack GO-J, Arvin Meritor 0-76-N, 0-94, ZF TE-ML 02B, 05A, 07A, 08, 12B, 12L, 12N, 16B, 16F, 17B, 19C, 21A, 24A, Iveco, DAF, Volvo 97312., Scania STO 1:0, STO 1:IG, STO 2:0A FS, MB-235.8.
	205L	HPS 205	
Lodexol Ultra Drive 80W-90	25L	ULT 025	API GL-4, GL-5
	205L	ULT 205	
Multitrans ACV	25L	ACV 025	General Motors DEXRON® IIIH, Ford MERCON® / MERCON V®, MAN 339 Type V-1, V-2, Z-1, Z-2, Z-3, MB 236.6 / 235.28 / 235.29, Voith H.55.6335 / H.55.6336, ZF TE-ML 04D, 14B,17C (Approval Number ZF002268), Allison C-4 / TES-389 / TES-295, Volvo 97340 / Volvo Transmission Oil 97341:029 (Approved), Caterpillar TO-2, Chrysler ATF + 4
	205L	ACV 205	
Multitrans VTS	25L	VTS 025	General Motors DEXRON® IIIH*, Ford MERCON® / MERCON V® *, MAN 339 Type Z-1, Z-2, V-1, V-2, MB 236.1, 236.5, 236.6, 236.7, 236.9, 236.10, Voith H.55.6335, ZF TE-ML 02F, 03D, 04D, 09, 11A, 11B, 14A, 14B, 16L, 17C, Allison C-4 / TES-389, Volvo 97340 / 97341, Caterpillar TO-2. *Ford and GM vehicles -model year prior to 2006.
	205L	VTS 205	
	1000L	VTS 102	
Multitrans MTS 75W-90	25L	MCS 025	API GL-5, API MT-1, SAE J2360, Scania STO 1:0, MIL-PRF-2105E
	205L	MCS 205	
	1000L	MCS 102	
Multitrans TMX 75W-90	25L	TMX 025	API GL-4, MB 235.11, MAN 341 Type MB, ZF TE-ML 08
	205L	TMX 205	
	1000L	TMX 102	
Multitrans SA 75W-140	25L	STT 025	API GL-5, API MT-1, SAE J2360, Scania STO 1:0 / STO 2:0A, Arvin Meritor 076-M, 076-Q*, Mack GO-J, ZF TE-ML 05B / 07A / 12B / 12L / 12N / 16F / 19C / 21B, MIL-PRF-2015E. *meets the requirements
Liquimatic Super ATF	12 x 1L	ATF 001	Dexron® IIIH, Ford ESP-M2C138-CJ / 166-H, Ford Mercon®, Allison TES389B, Allison TES-228 (C-4). <b>Please see Technical Data Sheet for full list of specifications.</b>
	4 x 5L	ATF 005	
	25L	ATF 025	
	205L	ATF 205	



A range of high-performance greases suitable for a wide range of commercial vehicle applications, including wheel bearings, CV joints, hydraulics and mechanical components.



Product Name	Pack Sizes	Part No.
<b>K2EP Longlife Grease</b> Premium quality multi-purpose lithium complex grease for lubricating all anti-friction and plain bearings. NLGI No.2	36 x 400g	KLG 400
	12.5kg keg	KLG 075
	50kg keg	KLG 050
	180kg barrel	KLG 180
<b>K323 Premium Blue Grease</b> Lithium / calcium base grease which incorporates modern polymer technology. This advanced grease has a high level of water tolerance, mechanical stability and adherence. NLGI No.2/3	36 x 400g	PBG 400
	12.5kg keg	PBG 075
	50kg keg	PBG 050
	180kg barrel	PBG 180
<b>K41EP Grease</b> Premium quality multipurpose greases for use in all anti-friction and plain bearings subjected to high shock load and vibration conditions. It is used extensively for applications throughout industry and the automotive sector. NLGI No.1	12.5kg keg	KFO 075
	50kg keg	KFO 050
	180kg barrel	KFO 180
<b>K42EP Grease</b> Premium quality multipurpose greases for use in all anti-friction and plain bearings subjected to high shock load and vibration conditions. It is used extensively for applications throughout industry and the automotive sector. NLGI No.2	36 x 400g	KFT 400
	12 x 500g	KFT 500
	3kg	KFT 003
	12.5kg keg	KFT 075
	50kg keg	KFT 050
	180kg barrel	KFT 180
<b>K43 EP Grease</b> Premium quality multipurpose greases for use in all anti-friction and plain bearings subjected to high shock load and vibration conditions. It is used extensively for applications throughout industry and the automotive sector. NLGI No.3	36 x 400g	KEP 400
	3kg	KEP 003
	12.5kg keg	KEP 075
	50kg keg	KEP 050
	180kg barrel	KEP 180
<b>K25 Graphited Calcium Grease</b> Manufactured from a Calcium soap base and highly refined mineral oil, with added graphite to provide boundary lubrication and protection against seizure in conditions when ordinary greases would fail. NLGI No.2	12.5kg keg	GCG 075
	50kg keg	GCG 050
<b>K383 Anti-Seize Compound</b> Lead free anti seize compound, made from high quality mineral oils, non-soap thickener incorporating copper powder and graphite. Anti-seize properties enable this grease to work even if the joints become so compressed that most of the compound is squeezed out, or excessive temperature flashes off the oily part of the compound. A fine film of copper particles always remain in joints or threads to prevent seizure. NLGI No.1/2	12 x 500g	ASC 500
	3kg	ASC 003
	12.5kg keg	ASC 075
<b>K48 Moly Grease</b> Premium quality multi-purpose grease for use in all anti-friction and plain bearings subjected to high load conditions. The incorporation of Molybdenum Disulphide imparts a high degree of wear protection against load, shock loading and dusty environments. NLGI No.2	3kg keg	KFG 003
	12.5kg keg	KFG 075

## MAINTENANCE AND WORKSHOP PRODUCTS

The maintenance and workshop products are designed to meet the heavy demands of scheduled maintenance and emergency repairs on agricultural equipment, farming machines and air compressors. This product range also includes workshop consumables and hand care products suitable for a multitude of demanding applications.



Product Name	Pack Sizes	Part No.	Specifications	Product Name	Pack Sizes	Part No.	Specifications		
Race ATV 10W-40	12 x 1L	ATV 001	API SL, JASO MA2	Workshop Pro All Seasons Screen Wash	4 x 5L	SEM 005	Recommended for all windscreen washer systems on all vehicles including cars, vans, HGV's and PSV's.		
	4 x 4L	ATV 004			205L	SEM 205			
	25L	ATV 025		Workshop Pro Traffic Film Remover	4 x 5L	CAD 005	Designed to chemically remove road film from vehicles. This reduces the need for mechanical agitation and rapidly lifts dirt, grime and oil from painted surfaces.		
	205L	ATV 205			25L	CAD 025			
Dot 4 Brake Fluid	500ml	BRA 500	FMVSS 116 DOT 3 and DOT 4, SAE J 1703 and J 1704, ISO 4925 (Classes 3 & 4), JIS K 2233	205L	CAD 205				
	12 x 1L	BRA 001		Workshop Pro Premium Hand Cleanser	4 x 5L	MOM 005	Suitable for use in all areas and types of industry. It cleans deep into the pores, providing lasting skin-protection and replacing the skins natural oils. Premium Hand Cleanser will remove a wide-range of products from soiled skin including oils, greases, tar, bitumen and printing inks.		
LHM Plus Suspension Fluid	12 x 1L	LHM 001	ISO 7308, PSA B71 2710, Ford ESN M6C 59A		Workshop Pro Citrus Hand Gel	4 x 5L		ABG 005	Workshop Pro Citrus Hand Gel will remove all types of dirt and grime, including oil, grease, swarf, some paints, creosote, tar products, adhesives, chemicals, powders, printing inks, crayon and marker pens.
	205L	LHM 205							
Milking Machine Vacuum Pump Oil	4 x 5L	VPO 005	Suitable for use in a variety of pump designs operating in all temperatures and conditions. Also recommended for the lubrication of associated milk handling hydraulics and equipment	Workshop Pro Premium Barrier Cream			12 x 1L		
	25L	VPO 025							
	205L	VPO 205							
Air Force 4000 ISO VG 32	4 x 5L	AFT 005	DIN 51506 VDL, ISO 6743-3: DAG for rotary screw	Workshop Pro Premium After-Work Lotion	12 x 1L	PAL 001	A light fatty skin care lotion that is dispersed easily and is absorbed quickly. It invigorates by actively drawing upon the immune system of the healthy skin and boosts the regeneration of affected areas of the skin. This keeps the skin healthy, supple and well looked- after.		
	25L	AFT 025							
	205L	AFT 205							
Air Force 4000 ISO VG 46	4 x 5L	AFF 005	DIN 51506 VDL, ISO 6743-3: DAG for rotary screw	Workshop Pro Citrus Hand Gel	4 x 5L	ABG 005	Workshop Pro Citrus Hand Gel will remove all types of dirt and grime, including oil, grease, swarf, some paints, creosote, tar products, adhesives, chemicals, powders, printing inks, crayon and marker pens.		
	25L	AFF 025							
	205L	AFF 205							
Air Force 4000 ISO VG 68	4 x 5L	AFO 005	DIN 51506 VDL, ISO 6743-3: DAA and DAB for reciprocating ISO 6743-3: DAG for rotary screw	Workshop Pro Premium Barrier Cream	12 x 1L	BAR 001	Premium Barrier Cream prevents noxious substances coming into contact with the skin and stops soiling from penetrating deep into the skin, as well as reducing skin irritation and minimising allergy and sensitivity potential.		
	25L	AFO 025							
	205L	AFO 205							
Ankor Wax Preservative Fluid	4 x 5L	WAX 005	<b>Protection Performance:</b> Indoors: 3 – 5 years Covered Outdoors: 2 years Outdoors: 18 months	Workshop Pro Premium After-Work Lotion	12 x 1L	PAL 001	A light fatty skin care lotion that is dispersed easily and is absorbed quickly. It invigorates by actively drawing upon the immune system of the healthy skin and boosts the regeneration of affected areas of the skin. This keeps the skin healthy, supple and well looked- after.		
	205L	WAX 205							
Lydian Degreasing Fluid	4 x 5L	LYD 005	Recommended for removal of oil grease and dirt from metal, paintwork and concrete					Workshop Pro Premium After-Work Lotion	12 x 1L
	25L	LYD 025							
	205L	LYD 205							
De-ionised Water	12 x 1L	DEW 001	Morris Deionised Water exceeds the requirements of BS4974:1975 Grade B, "water for lead- acid batteries.	Workshop Pro Premium After-Work Lotion	12 x 1L	PAL 001	A light fatty skin care lotion that is dispersed easily and is absorbed quickly. It invigorates by actively drawing upon the immune system of the healthy skin and boosts the regeneration of affected areas of the skin. This keeps the skin healthy, supple and well looked- after.		
	4 x 5L	DEW 005							
	25L	DEW 025							
Super Absorbent Floor Dressing	20L Bag	FLO 030	Recommended to prevent, or minimise, damage from any spill or leak. Immediate use of granules following any spill can stop pollutants getting into drains.	Workshop Pro Premium After-Work Lotion	12 x 1L	PAL 001	A light fatty skin care lotion that is dispersed easily and is absorbed quickly. It invigorates by actively drawing upon the immune system of the healthy skin and boosts the regeneration of affected areas of the skin. This keeps the skin healthy, supple and well looked- after.		

## WORKSHOP AEROSOLS

The workshop aerosols are a range of superior performance maintenance sprays suitable for a multitude of demanding applications when running, maintaining and repairing agricultural equipment. Products include maintenance spray, chain lubricant, solvent cleaner, anti-seize compound, degreaser PTFE grease and carb cleaner.



Product Name	Pack Sizes	Part No.	Specifications
Workshop Pro MD-4	400ml	MDF 400	Superior performance multipurpose maintenance spray. Effective, damp start and penetrating fluid with outstanding corrosion protection properties.
Workshop Pro Chain Lubricant Semi Synthetic	400ml	CCL 400	Specially formulated aerosol designed for the protection of chains used in a variety of applications.
Workshop Pro Solvent Cleaner	400ml	SOL 400	A complex mixture of hydrocarbon and oxygenated solvents designed to clean and degrease all flat and irregular surfaces
Workshop Pro Anti-Seize Compound	400ml	PSE 400	Highly recommended as a thread lubricant on the external parts of all racing motorcycles, where rapid and trouble free disassembly by pit crews is a competitive essential.
Workshop Pro Solvent Degreaser	400ml	PAV 400	Ready for use, pink coloured emulsifiable fluid, manufactured from a highly refined hydrocarbon solvent and a non-ionic surfactant. It was originally developed for rapid de-waxing of car bodies.
Workshop Pro Carb Cleaner	400ml	CAR 400	Designed to remove dirt, grime and accumulated oily deposits from carburetors and fuel injection systems. It can also be used with great effect to restore tune to carburetors in situ.
Workshop Pro White Grease with PTFE	400ml	WTG 400	Scientifically prepared combination of calcium and zinc based grease with PTFE. Offering excellent resistance to water and heat and also long lasting protection against corrosion.

## ANTIFREEZE / COOLANTS

Antifreeze and coolants protect engines from frost damage in extreme low temperatures and yield excellent heat transfer properties. They also provide outstanding protection against rust and corrosion for all parts of the cooling system such as thermostats, radiators and water pumps. Certain products in the range have long life properties to help reduce service intervals.



Product Name	Pack Sizes	Part No.	Specifications
Ultralife Red Antifreeze Coolant	12 x 1L	ULR 001	ASTM D3306. ASTM D 4985. SAE J 1034. BS 6580 (2010). AFNOR NF R15-601 *. FFV Heft R443. CUNA NC 956-16. UNE 26361 - 88. JIS K 2234 *. NATO S 759. (* with the exception of reserve alkalinity).
	4 x 5L	ULR 005	
	20L	ULR 020	
	205L	ULR 205	
Ultralife 1 Antifreeze Coolant	4 x 5L	ULO 005	ASTM D3306, ASTM D4985, SAE J 1034, BS 6580 (2010), Case CNH MAT 3624 / MAT 3724, Isuzu UD Trucks, DAF, Fiat Powertrain FPT FP19_Cool002, Leyland Trucks, Jaguar / Land Rover STJLR.03.5212, Mack VCS-2 (STD 418-0007), Renault VCS-2 (STD 418-0007), Volvo VCS-2 (STD 418-0007), Volvo Construction VCS-2 (STD 418-0007), Volvo Penta VCS-2 (STD 418-0007), Volvo Trucks VCS-2 (STD 418-0007), Evobus, Freightliner, MB 325.3, Deutz DQC CB-14, MAN 324 Typ SNF.
	20L	ULO 020	
	205L	ULO 205	
Ultralife 3 Antifreeze Coolant	4 x 5L	UTH 005	Meets the following standards: ASTM D3306, JIS K2234:2018, FVV R 530:2005, BS6580:2010*, Ö-Norm <sup>1</sup> *, GB 29743:2013*, AFNOR 15-601. (*except for RA, *modified). Suitable for use in / meets the requirements of: MAN 324NF, MAN 324 Si-OAT, MWM 0199-99-2091/12, Iveco, Standard 18-1830, Cummins 85T8-2, MB 325.5, Deutz DQC CA-14, JI Case JJC-501, MTU/Rolls Royce MTL 5048, Scania TB 1451.
	20L	UTH 020	
	205L	UTH 205	
Ultralife 4 Antifreeze Coolant	20L	ULM 020	ASTM D3306, D4656, D4985, D6210, BS6580, SAE J1034, GE Jenbacher TA 1000-0200, GE Waukesha, Caterpillar GCM34, MWM 0199-99-2091/12, Rolls Royce Power Systems MTU MTL 5048, Rolls Royce Power Systems Bergen 2.13.01, VW MAN 324 Typ SNF, Diesel and Turbo SE, VW MAN B&W AG D36 5600, B&W A/S, Wartsila SACM Diesel DLP799861, Wartsila 32-9011, Cummins 85T8-2, IS Series u N14, CES 14603, CES 144439. Also suitable for use in: AGCO Fendt/Valtra, Perkins, Claas, John Deere JDM H5, Volvo AB Penta, Volvo Construction / Trucks. Please see TDS for full list of specifications.
	205L	ULM 205	

# WANT TO KNOW WHAT OIL TO USE?

To find what oil you need, scan the QR code for the recommended oils, greases & lubricants for your vehicle.



**whatoil?**  
whatoilneed.com

Scan me...



**MORRIS**  
LUBRICANTS

 <p>ISO 9001 Quality Management Systems CERTIFIED</p>	<p>ISO 14001 Environmental Management CERTIFIED</p>	<p>ISO 45001 Occupational Health and Safety Management CERTIFIED</p>	<p>ISO 50001 Energy Management CERTIFIED</p>
FM 21756	EMS 60044	OHS 555083	ENMS 619355



[/morrislubricants](https://www.facebook.com/morrislubricants) | 
 [@morrislubricantsuk](https://www.instagram.com/morrislubricantsuk) | 
 [/morris-lubricants](https://www.linkedin.com/company/morris-lubricants)  
**www.morrislubricants.co.uk**

All the products are reflective of the latest specifications at the time of going to press and are part of a continuous development programme. The company reserves the right to change formulation and specification, without prior notice to meet the latest trends and developments in lubricant and grease technology. For more detailed information on any product and confirmation of the latest specifications contact our Technical Services Department. Full product data sheets and health and safety information is available on request.